



Colossus

Transforming the control hot tub

- Unparalleled system reliability
- Friendly user interface
- Manufacturing flexibility & easy configuration
- Hi-tech material will prevent corrosion; chemical resistant heater
- Allows addition of auxiliary panels & the Dolphin™ Remote



Announcing...

The Colossus Control System for your Hot Tub



Features

- Unparalleled system reliability
- Manufacturing flexibility
- Control panel has a user friendly interface
- Hi-tech material prevents corrosion; corrosion resistant, chemical resistant heater



User Interface

- Intuitive menu
- Easy to read color display with graphics
- Background color interchangeable
- Multiple AV operations control your Stereo, TV and DVD
- Smart chip will detect any problems in your hot tub
- Animation display graphics



Easy Navigation

- New button technology solid state
- Up/Down
- Left/Right
- Select

Incomparable System Reliability

Utilizing advanced technology and high-temperature corrosion resistant mission critical materials from the automotive and other industries, the Colossus hot tub control systems all but eliminate leaks due to corrosion or harsh chemicals. Together with a newly designed, energy efficient heating coil that reduces element failures due to rattling, Balboa is providing peace of mind for the end-user.



Product Descriptions

Colossus BP25P3BC **Material No.: 55963-01**

Control Panels: TP900 with Overlay (12513)

TP901 without Overlay (50262)

For International

Colossus BP26P3BC 3.0kW Incoloy **Material No.: 55976-02**

Colossus BP26P3BC 3.0kW Titanium **Material No.: 55977-02**

Control Panels: TP900 with Overlay (12513)

TP901 without Overlay (50262)

Note: Minimum quantity required, please call Balboa customer service for additional information.

Colossus System Specifications

Material No.	Pump 1	Pump 2	Pump 3	Circ Pump	Blower	AV (Stereo)	Ozone	Spa Lights	Heater
55963-01	240V 2 Speed	240V 2 Speed	240V 2 Speed	240V 1 Speed	240V 1 Speed	120V	120V	12V	5.5kW @ 240V
55976-02	230V 2 Speed	230V 2 Speed	230V 2 Speed	230V 1 Speed	230V 1 Speed	230V	230V	10V	3.0kW @ 240V
55977-02	230V 2 Speed	230V 2 Speed	230V 2 Speed	230V 1 Speed	230V 1 Speed	230V	230V	10V	3.0kW @ 240V


Note: Above are evaluation systems only. Colossus system models can be custom configured. Model BP26P3BC is CE version.

Environmental	
Operating Temperature	-20°C (-4°F) to 60°C (140°F)
Storage Temperature	-25°C (-13°F) to 85°C (185°F)
Humidity	Humidity: up to 85% RH, non condensing
Mechanical	
Weight: Dimensions (W x H x D)	15.5" (39.38cm) x 14.8" (37.59cm) x 6.4" (16.25cm) (without tail pieces)
Enclosure	
IPx5	Thermoplastic Heater
Certifications	
UL Standard/Files	UL 1563 5th Edition/E90059 UL 1795 3rd Edition/E188744

Powerful, Yet Simple Userface

A sleek new topside panel includes a large easy to read back-lit LCD with simple to follow end user menus. With new press and hold button technology, setting temperature and other common tasks have been simplified. User navigation is intuitive and easier than ever, reducing customer service help calls.

Panel TP900 Measurements

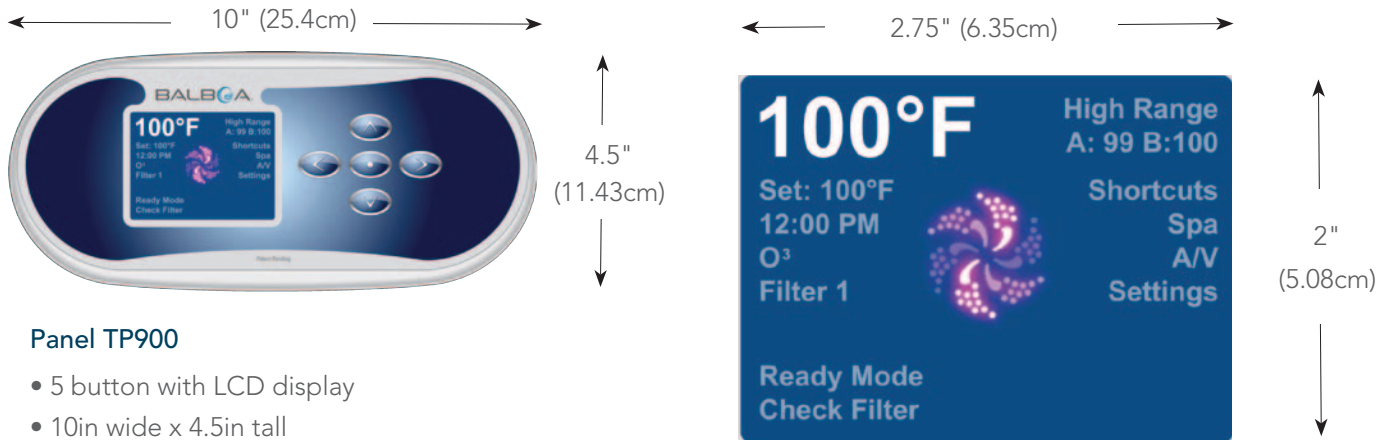


Panel TP900

- 5 button with LCD display
- 10in wide x 4.5in tall
- 25.4cm wide x 11.43cm tall


Domestic Panels TP900 Material No.:

- 55994: No Overlay
- 55995-01: With Overlay (12513)

Colossus System Measurements

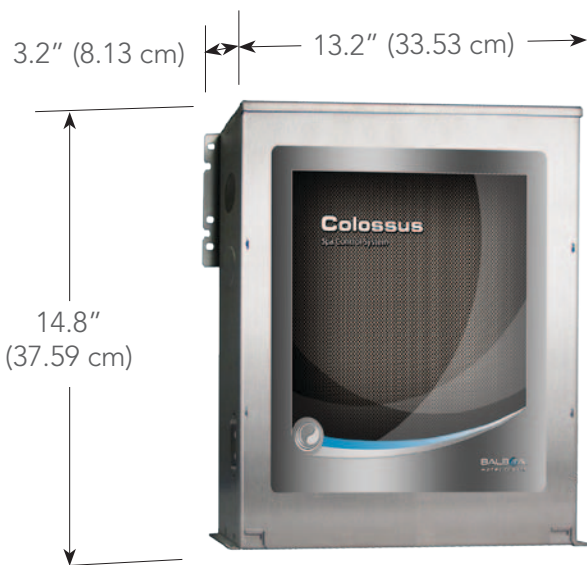

System Heater Technology and Remote




Unparalleled system reliability

- Chemical resistant heater element & sensors
- Low-watt density efficient coiled element
- Patented heater design eliminates "rattle"
- Corrosion resistant, chemical-resistant heater housing
- Titanium element option



Unparalleled system reliability

- High-tech, high-temperature resistant housing material
- Proven use in mission critical applications for automotive & other industries



Universal Dolphin Remote

- Dolphin remote is waterproof, a universal control, it floats on water, has an ergonomic grip & tactile buttons
- Allows direct control of volume and channels

COLOSSUS1011

©2011 Balboa Water Group. Your Single Source Solution. All rights reserved.
1382 Bell Avenue | Tustin, CA 92780 | p 714.384.0382 | www.balboawatergroup.com

Balboa reserve the right to change technical data without further notice.

BALBOA
water group